


HF OCA 7000 cu ft Hyper Purifier 5000 psi

SKU: HF-962-134-F

Price: ?2,866.38

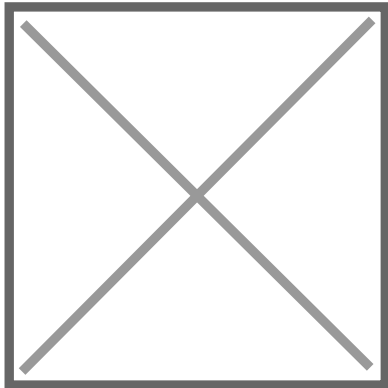

Description

Oxygen Compatible Air (OCA) Hyper Pure filter system includes:

- Inlet isolation valve and manifold
- Redundant check valves
- Priority valve
- Pressure gauge
- Petcock vent
- All stainless steel couplers and fasteners
- High efficiency micron filter
- Filter cartridge set
- Instruction manual

Replacement filter element: SKU [X96338](#)

Specifications

Working Pressure	2000-5000 psi (138-345 bar) maximum
Operating Temperature	100°F (37.8°C)
Flow Rate	6 SCFM (170 L/min)
Cubic Feet	7000
Safety Factor	4:1
Cycle Life	15,000

Construction of Cartridge Holder Aluminum with bronze hard anodize

Options	? High capacity micronic filter and ultra efficiency micron ? Handle ? SCBA or SCUBA inlet stem adapter
Dimensions	11 in H × 32 in W × 6 in D
Clearance	Allow 22 in overhead clearance for filter cartridge changes
Warranty	One year

* Specific to the HF series of purifiers, "zero air" is defined as specially polished Grade E air that contains less than 0.1 ppm of hydrocarbon impurities. It is usable in mixing with pure oxygen or other gases.