


Hand Operated 3-Way Vented Toggle Valve

SKU: 816-V

Price: ?196.00

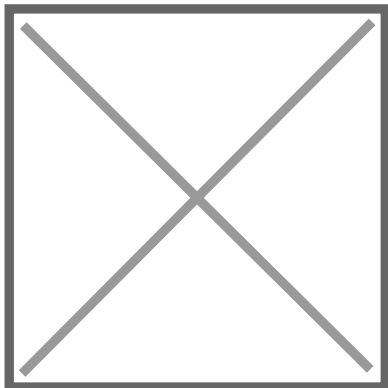

Description

Specifications

Type	Hand Operated 3-Way Vented Open/Close Valve
Maximum Rated Pressure	6000 psi
Maximum Differential Pressure	6000 psi
Inlet Port Size	1/4" MNPT
Outlet Port Size	1/4" FNPT
Outlet Pressure Rating	6000 psi
Leakage	Bubble tight
Weight	9.2 oz (260 g)
Overall Length	4.5"
Hex Diameter	1.38"
Minimum Temperature	-15°F (-26°C)
Body Material	Anodized Aluminum
Internal Materials	Brass Stainless
Seal Materials	Kel-F Viton
Flow Coefficient (Cv)	0.05 (equals 0.07 in orifice)

Typical Applications

- Test panels where fast, accurate, hand control of pressure is desired
- Gas supply interlocks such as protective doors on charging stations
- Component testing
- Process industry control
- Charging stations where it is desirable to have the supply shutoff if operator releases control